Alu-Cab™

ULTIMATE OVERLAND PRODUCTS

FITMENT INSTRUCTIONS

Grenadier Rear Door Drop-down Table

DISCLAIMER

Preliminary information

All rights reserved. No part of this document may be reproduced, translated, stored in a retrieval system. Or transmitted, in any form or by any means, electronic., mechanical, photocopying, recording or otherwise, without prior written permission of the owner.

Review all instruction information carefully before installation.

Any damages, direct or indirect to the installer and/or property due to incorrect installation of any parts are the responsibility of the installer. Due to the various application and firment options available, the responsibility lies with the user to ensure all mounting points are secure and tight before every trip. If unsure, consult with your Distributor regarding the operations of our products.

Users are advised to be mindful of the load they are carrying and drive in accordance with road conditions.



Service Enquiries email
queries@alu-cab.com

Installation Instructions

The tables below show the equipment, i.e. tools and fasteners required to install the Ineos rear drop down table.

1.1

Tools & Items Required
Size 10 spanner
Or 10 Socket and Wrench
H4 Allen Key

1.2

Fasteners Supplied	Qty
M6 x 18mm oversized washers	39
M6 x 25 B/HD Bolt	4
M6 Nyloc Nut	8
6mm Nut cap	4
Nylon Spacer bush	8
M6 x 45 B/HD Bolt	8
M6 Spring Washer S/S	15


Please be sure to lay out all parts provided on a table or flat surface in order to check that all required parts are accounted for and prevent potential frustration at a later stage.

Installation Instructions

STEP 1

Remove panel in the rear door to expose First Aid kit, and store the panel.



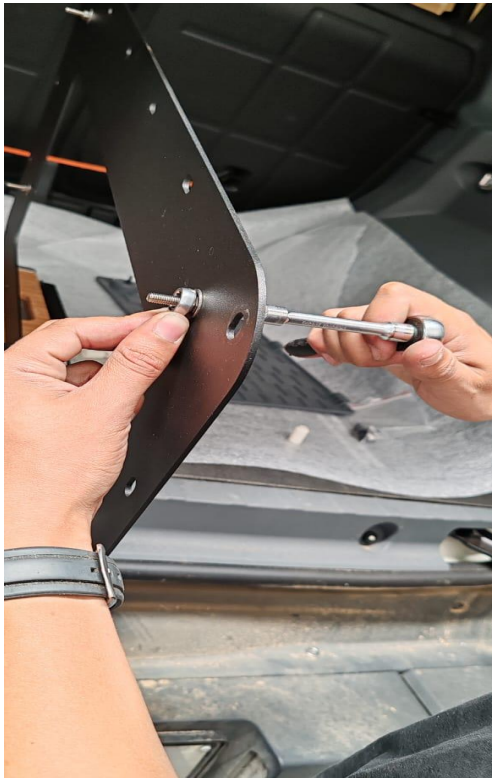

Installation Instructions

STEP 2

Tighten M6x25 B/HD bolt and M6 nyloc nut with backing plate between and M6x18mm oversized washers on either side of backing plate. Make sure nyloc nut goes all the way down to backing plate. Do all 4 M6x25 B/HD bolts.





Installation Instructions

STEP 3

Remove these screws as the backing plate gets mounted on these points



Installation Instructions

STEP 4

Align backing plate to where holes are to be mount, tighten backing plate onto rear door with M6x45 B/HD bolt and nylon spacer bush between backing plate and rear door with M6 Spring Washer and M6x18mm oversized washers on either side of backing plate.





Installation Instructions

STEP 5

With the Backing plate fitted, mount the back of the drop down table onto these 4 M6x25 B/HD bolts of the backing plate.




Installation Instructions

STEP 6

Mount with M6 nyloc and cover with M6 nut cap

Please Note: Make sure to place M6x18mm oversized washers on either side of the back of the drop down table

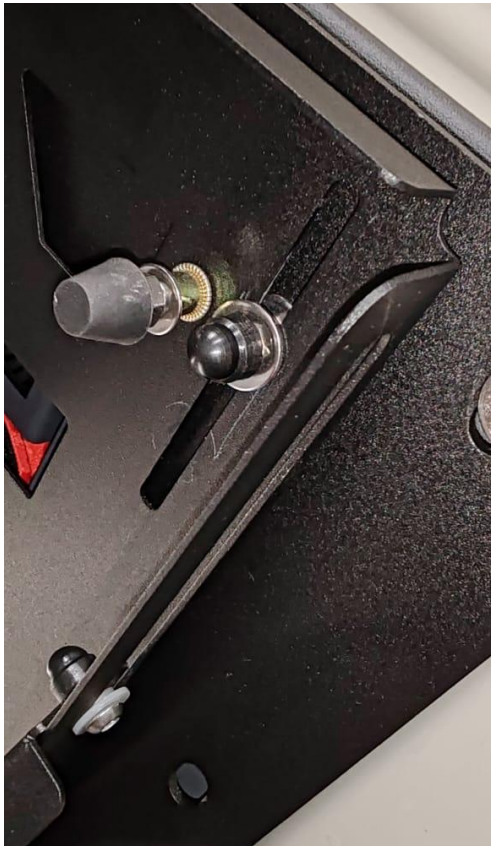

Installation Instructions

STEP 7

The Slots allow for the drop down table to be moved slightly up or down. Move into appropriate position and tighten M6 nyloc nuts to complete the Fitment of your New Ineos rear drop down table.





Drop-down position

Fold away position





Cutting board extended

Disclaimer

All rights reserved. No part of this website may be reproduced, translated, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission of the owner.

Review all instructions information carefully before installation.

Any damages, direct or incidental to the installer and/or property due to incorrect installation of any parts are the responsibility of the installer. Due to the various applications and fitment options available, the responsibility lies with the user to ensure all mounting points are secure and tight before every trip.

If unsure, consult with your Distributor regarding the operations of our products.

Users are advised to be mindful of the load they are carrying and drive in accordance with road conditions.

WARNING

Always wear appropriate PPE (Personal protection equipment) when fitting our products. Although the mounting kit is designed to be DIY, if you have any doubts or concerns, contact an accredited fitment centre to carry out the work. Alu-Cab will not be liable for any injury to persons, and/or damage to products and/or vehicles.

While Alu-Cab Holdings takes reasonable measures to ensure that the contents of this Website are accurate and complete, Alu-Cab Holdings makes no representations or warranties, whether express or implied, as to the quality, timeliness, operation, integrity, availability or functionality of this Website or as to the accuracy, completeness or reliability of any information on this Website. Alu-Cab Holdings reserves the right to make changes, corrections and/or improvements to the information and to the products and programs described in such information, at any time without notice.

Alu-Cab Holdings will use reasonable endeavours to maintain the availability of the Website, except during scheduled maintenance periods, and reserves the right to discontinue providing the Website or the service or any part thereof with or without notice to you. Any person who accesses this Website or relies on this Website or on the information contained in this Website does so at his or her own risk.

Occasionally, at our discretion, we may include or offer third-party products or services on our website. These third-party sites have separate and independent privacy policies. We therefore have no responsibility or liability for the content and activities of these linked sites. Nonetheless, we seek to protect the integrity of our site and welcome any feedback about these sites.